

# FELUN-RWY-TH-LI-GO

Autonomous lighting system



ICAO Compliant Equipment Annex 14 Volume 1 - FAA compliant equipment.



## APPLICATION


Green low-intensity omnidirectional runway threshold light, compliant with non precision approach usage.

The FELUN® is an autonomous battery powered light equipped with solar panels. It is radio-controlled and designed for permanent or mobile usage.

## MAIN CHARACTERISTICS

- Great autonomy : 180h in non precision approach
- Max light output: 100cd sur 180°
- High performance integrated directive antenna
- Resin-coated electronics (IP68)
- Designed to reduce and simplify maintenance

## PHOTOMETRY

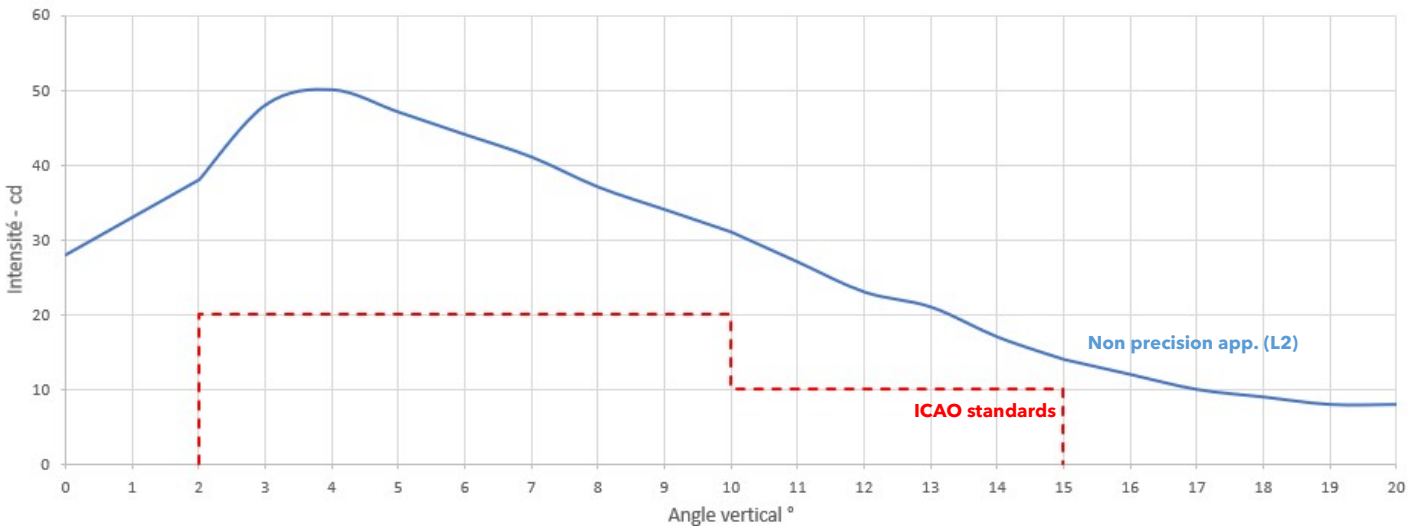


## ORDER CODE

FELUN-RWY-TH-LI-GO - **A** - **A** - **A** - **A**


Battery	Solar panels	GPS	Magnetic mounting
A 17A.h battery	A 4 panels 2W kit	A With GPS	A With magnetic mounting
B 24A.h battery	N No panel	N No GPS	N No magnetic mounting

The light mounting accessories are available in the FIX documentation.  
Control systems are available on the CAESAR documentation.

## OVERVIEW

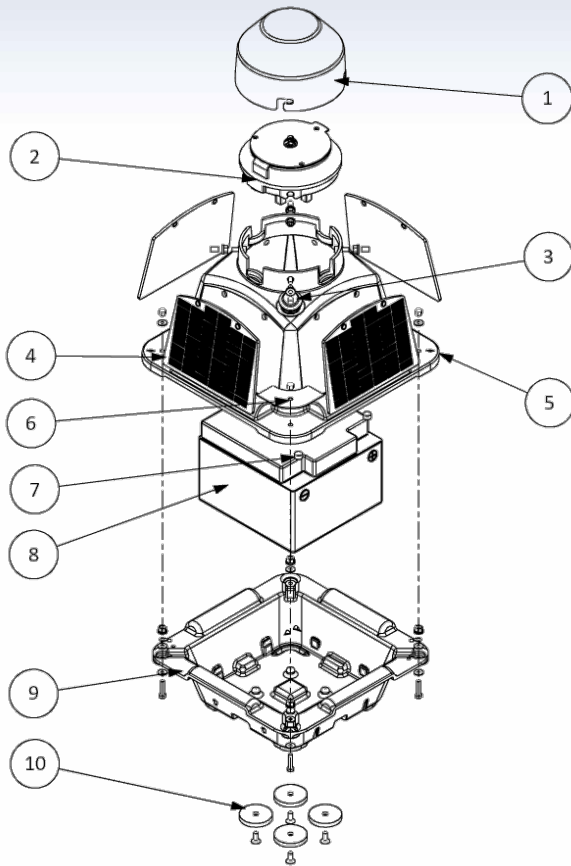

1. Optical glass
2. Resin-coated electronics
3. Push button
4. Solar panel
5. Body
6. Identification plate
7. Battery protection covers
8. 12V Battery
9. Base
10. Mounting magnets

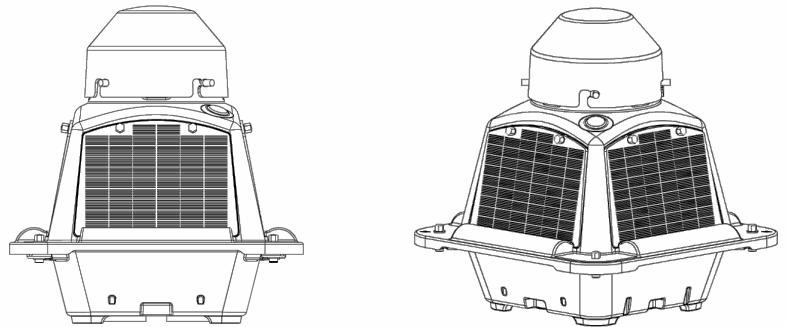

## TECHNICAL SPECIFICATIONS

### OPTIC

- Green light, 50cd component 360° omnidirectional
- Five levels of brightness (L1 to L5)
  - L1: Visual approach (avg>25cd)
  - L2: non precision approach (avg>50cd)
  - L3 to L5: avg > 80cd, 130cd, 190cd
- LED technology, LED lifespan 100 000 h
- User-replaceable light source
- Infrared light source (NVG) optional

### CONFORMITY

- Compliant for non precision approach according to ICAO Annex 14 Volume July 2018
- STAC certified N° 2021-068\_AER (-20°C to +55°C)
- CE compliant
- ISO 9001 / ISO 14001 design and manufacturing

### ENVIRONMENT

- Operating temperature : from -20°C up to +60°C
- Resin-coated electronics IP68

### RADIO

- Zigbee Mesh network 868Mhz
- High performance integrated directive antenna (Gmax 2.48dB)
- Operating range: 2km from control tower, 500m between lights

### ENERGY

- Beacon consumption:
  - Sleep mode (stocking): 0,006W
  - Running mode, light off: 0,2W
  - L1 / L2 / L3 / L4 / L5: 0,8W / 1,6W / 2,2W / 2,5W / 2,7W
- VRLA 12V battery, lifespan 10-12 years (EUROBAT), Temperature range -20°C to +60°C
  - Model A: 17A.h (204Wh)
  - Model B: 24A.h (288Wh)
- Polycrystalline solar panels 4x2W
- On station charge : tension 8V-24Vdc, fast charging 50Wh

### AUTONOMY

	Bat 17A.h*	Bat 24A.h*
Lights off	42 jrs	60 jrs
Brightness L1	10,5 jrs	15 jrs
Brightness L2	5 jrs	7,5 jrs
Daily usage 4h L2 / 20h off	19 jrs	27 jrs

### PHYSICAL CHARACTERISTICS

- UV resistant polyethylene body (20 years of lifetime)
- PMMA dome (UV insensitive)
- Light magnetic fixation on galvanized metallic plate  
See doc FIX for more information
- Dimensions (l x w x h): 295 x 295 x 318mm
- Weight: 8,8Kg (battery model A) / 11,7Kg (battery model B)

\* Without power from solar panels